

50Ω Wideband 10 MHz to 10 GHz



CASE STYLE: GU1414-2

The Big Deal

- Extremely Wideband 10 GHz
- Miniature SMT (0.15" x 0.15")

Product Overview

The TCBT-14R+ surface mount bias tee provides outstanding application versatility, covering an ultra-wide frequency range of 10 MHz to 10 GHz with excellent isolation performance over the band. Its miniature package and surface mount are space-efficient and practical for automated pick and place operation. Designed to handle 30 dBm of RF power and 200 mA input current, the TCBT-14R+ is ideal for many communications and testing applications including biasing of amplifiers and MMICs, laser diodes and active antennas.

Key Features

Feature	Advantages
Wideband	The TCBT-14R+ achieves wide 10 MHz – 10 GHz frequency range to serve a large host of applications.
Low Insertion Loss	0.6 dB typ. insertion loss enables highly efficient signal amplification with minimal impact on gain.
Excellent VSWR	Well-matched for 50Ω systems at 1.25:1 typ. VSWR.
Miniature Size	Its miniature footprint (0.15" x 0.15") makes the TCBT-14R+ a high-performing space-saver in surface mount assemblies.
Aqueous Washable	The TCBT-14R+ features a unique open casing style which allows easy washing without trapping water.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Surface Mount Bias-Tee

50Ω Wideband 10 MHz to 10 GHz

TCBT-14R+



CASE STYLE: GU1414-2

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200, 500
13"	1000

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	30dBm max.
Voltage at DC port	25V max.
Input Current	200mA

Permanent damage may occur if any of these limits are exceeded.


Pad Terminations

RF	1
RF&DC	2
DC	4
NOT USED	3

Outline Drawing

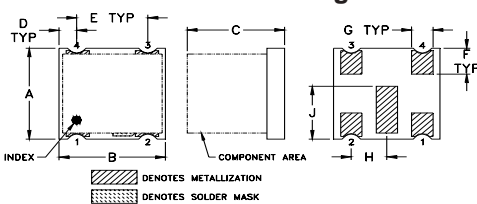

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
0.150	0.150	0.140	0.025	0.100	0.043	0.030	0.050
3.81	3.81	3.56	0.64	2.54	1.09	0.76	1.27
J	K	L	M	P	Q	R	wt
0.087	0.193	0.066	0.031	0.083	0.027	0.013	grams
2.21	4.90	1.68	0.79	2.11	0.69	0.33	0.06

Demo Board MCL P/N: TB-268 Suggested PCB Layout (PL-146A)

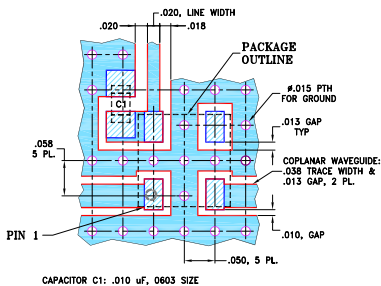

NOTES:
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020±0.0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

Features

- wideband, 10 to 10000 MHz
- low insertion loss, 0.6 dB typ.
- excellent VSWR, 1.25:1 typ.
- miniature surface mount 0.15"x0.15"
- aqueous washable
- protected by US Patent 8,644,029

Applications

- biasing amplifiers
- biasing of laser diodes
- biasing of active antennas

Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		10		10000	MHz
Insertion Loss	10 - 10000	0.05	0.6	1.6	dB
Isolation*	10 - 10000	15	33	—	dB
VSWR	10 - 10000	1.02	1.25	1.7	:1
DC Resistance, DC to RF and DC port	10 - 10000	—	1.0	—	ohms

* Isolation between DC to RF & DC 14 dB/min at 6-10 GHz

Typical Performance Data

Frequency (MHz)	INSERTION LOSS (dB)	VSWR (:1)		Isolation 0 mA	
		RF	RF&DC	RF-DC	RF&DC-DC
10.00	0.42	1.19	1.42	36.38	35.97
50.00	0.21	1.03	1.03	67.83	76.42
100.00	0.05	1.03	1.02	65.56	66.99
500.00	0.07	1.03	1.02	60.34	56.95
1000.00	0.09	1.02	1.02	51.24	48.05
2050.00	0.14	1.02	1.03	37.50	36.11
3100.00	0.19	1.08	1.08	31.08	29.64
4000.00	0.24	1.07	1.07	29.31	27.43
5050.00	0.33	1.04	1.03	26.34	24.91
6100.00	0.44	1.04	1.01	20.43	19.27
7000.00	0.66	1.09	1.07	16.60	15.87
8050.00	0.86	1.09	1.15	17.92	17.69
9100.00	0.92	1.23	1.22	19.03	18.34
9400.00	0.94	1.29	1.27	18.86	18.17
10000.00	0.98	1.45	1.41	17.61	17.20






Functional Schematic

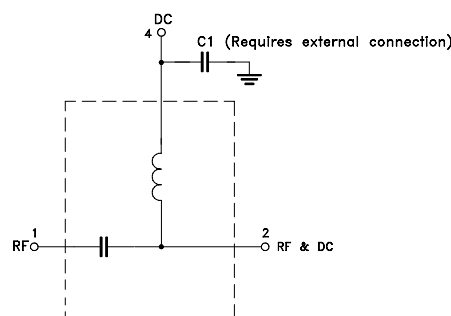

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M167305
TCBT-14R+
ED-14647/1
DJ/CP/AM
180418
Page 2 of 3

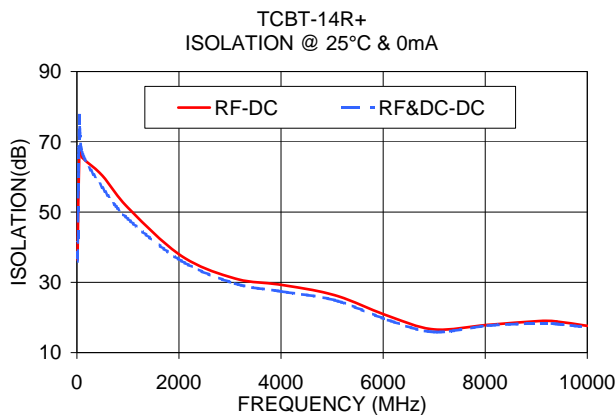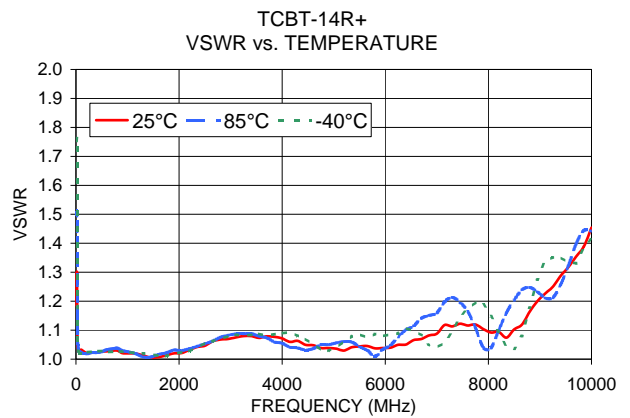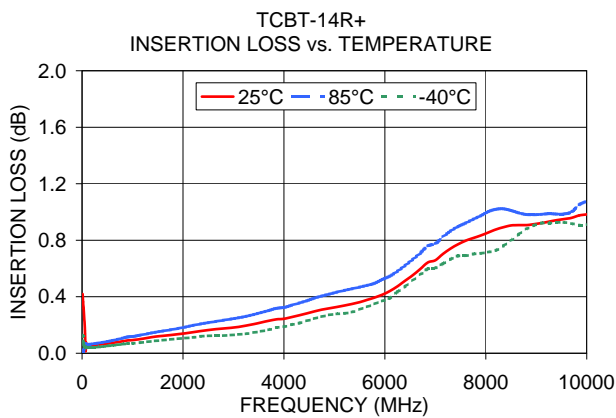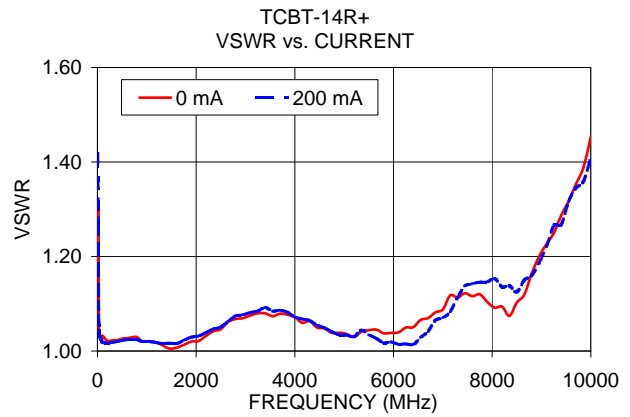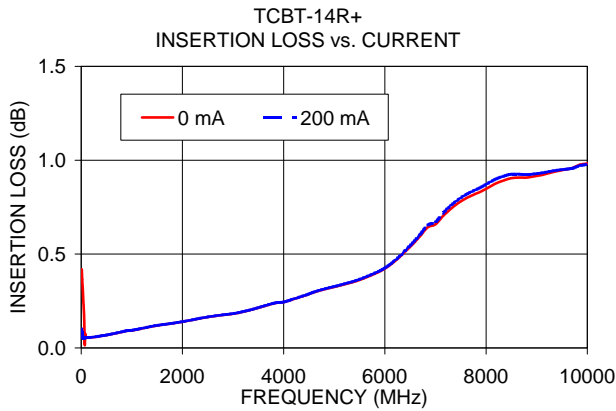

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

